



# PeakForm® SUPRAFINE XL

## 尖峰顶端® 3000型龙骨15mm(9/16”) 明架T型龙骨系统

### 产品技术要点 Technical Specification

尖峰顶端旋转咬合龙骨，外接式钢接头龙骨 Staked-on Clip Cross Tee  
主龙骨中等负荷ID(19.76Kg/m) Main Beam ID (19.76kg/m)  
主龙骨43mm高 43mm Main Beam

#### 凹槽颜色 Color



#### 建议使用场所 Typical Applications

- 办公室 Offices
- 娱乐中心 Hospitality
- 零售商店 Schools
- 医护中心 Hospitals
- 学校 Retail

#### 产品数据 Physical Data

材质 Material  
优质热镀锌钢带 Double-web hot dipped galvanized steel  
表面涂料 Surface Finish  
聚酯烤漆 Baked polyester paint

副龙骨/主龙骨连接方式 Cross Tee/Main Beam Interface  
XL-搭接 XL-Override

外形 Profile  
明架T型龙骨 Exposed tee system

端部连接 End Detail  
尖峰顶端主龙骨：外接式超级锁定钢插头  
Peakform main beam: Superlock Staked-on clip




产品代码 SUPRAFINE Main Beams		
产品编号 ITEM NUMBER	产品说明 DESCRIPTION	尺寸 DIMENSIONS
3000型主龙骨SUPRAFINE XL Main Beams		
BP754042*	3600mm主龙骨 3600mm Main Beam	3600×15×43mm
BP7542102**	3000mm主龙骨 3600mm Main Beam	3000×15×32mm
3000型副龙骨		
BP753042	1200mm副龙骨 1200mm Cross Tee	1200×15×43mm
BP7530102	1200mm副龙骨 1200mm Cross Tee	1200×15×32mm
BP753061	1200mm副龙骨 1200mm Cross Tee	1200×15×27mm
BP752042	600mm副龙骨 600mm Cross Tee	600×15×43mm
BP7520102	600mm副龙骨 600mm Cross Tee	600×15×32mm
BP752061	600mm副龙骨 600mm Cross Tee	600×15×27mm
边龙骨 ANGLE MOLDING		
BPT1945H	3000mm边龙骨 3000mm Angle Molding	3000×19×19 mm
BP784203	3000mm阶梯形边龙骨 3000mm Shadow Molding	3000×19×7×14mm
备注：吊筋跨度 1200mm HANGER SPACING 1200mm		* 承载LOAD: 19.7kg/m ID ** 承载LOAD: 8.52kg/m LD

#### 花纹及龙骨安装效果 Detail and Grid Intersections



### 详图 Details

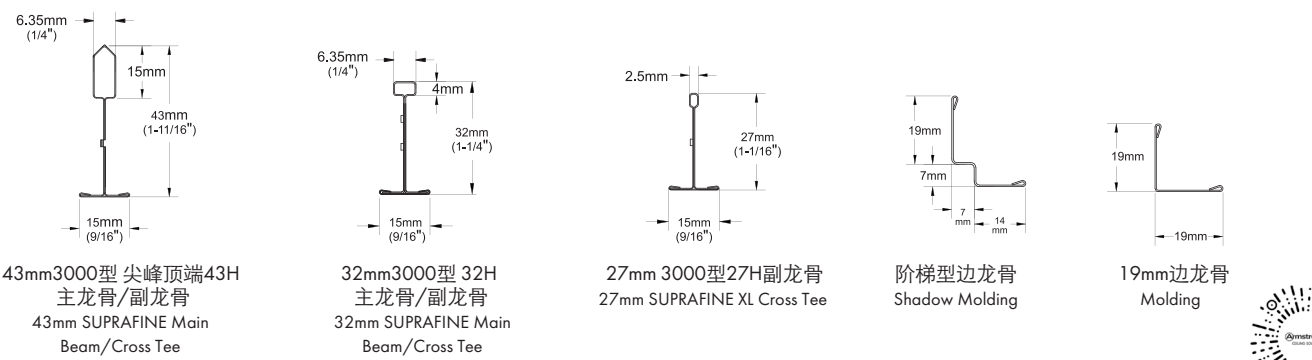

# PeakForm® SUPRAFINE XL

## 尖峰顶端® 3000型龙骨 15MM(9/16”)明架T型龙骨系统

### 产品特性 Product Attributes

- Hot dipped galvanized coating inhibits red rusting better than electrogalvanized, painted or tin plated systems  
热镀锌龙骨防锈蚀能力远胜于电镀锌，喷漆或镀锡龙骨
- System is engineered and designed to fit and provide a finish to coordinate with Armstrong Ceilings  
龙骨系统的安装及设计使之能与阿姆斯壮天花板完美配合并提供和谐一致的表面颜色
- PeakForm patented main beam profile for installation with Prelude XL stab-end cross tees  
尖峰顶端专利设计的主龙骨可与3000型XL外接式钢插头副龙骨完美安装。尖峰顶端尖型头部设计使主龙骨性能更完善增强强度和稳定性
- The PeakForm bulb design increases strength and stability for improved performance  
超级锁定主龙骨外接式钢接头使连接强度更大、更为安全及快速精确
- Superlock main beam clip engineered for a strong, secure connection and fast accurate confirmed with an audible click  
伴随连接完成时清晰的“咔嚓”声可确保安装完毕
- Easy to cut thanks to the PeakForm bulb design  
尖峰顶端尖形头部设计使剪切更为容易。尖峰顶端主龙骨的承载能力更强
- Rotary stitched for additional torsional strength and extra stability during installation  
旋转咬合的专利设计，增加额外的抗扭强度，确保安装稳定性
- Slots at 100mm centers for more flexibility  
尖峰顶端的槽口的中心距为100MM，使龙骨的安装变得更灵活
- Easy to remove and relocate  
易于拆卸及再次安装
- Faster and easier insertion/installation of XL cross tees  
与XL副龙骨连接/安装更快、更方便
- Tighter tee to tee connection  
使副龙骨之间的连接更牢固

再生材料  
**25%**



关注阿姆斯壮天花公众号  
获取更多精彩内容

knaufceilingsolutions.com



扫描二维码  
获取详细的产品信息